

## DESCRIPTION

The JLB05C is designed to replace multilayer varistors in portable applications such as cell phones, notebook computers and PDA's, using monolithic silicon technology to provide fast response time and ultra low ESD clamping voltage, making this device an ideal solution for protecting sensitive semiconductor components from damage. The ALB0510S3 complies with the IEC 61000-4-2 (ESD) standard with  $\pm 15\text{kV}$  air and  $\pm 8\text{kV}$  contact discharge. The ALB0510S3 is assembled into a lead-free SOD-323 package and will protect one uni-directional line. These devices will fit on the same PCB pad area as an 0805 MLV device.

## APPLICATIONS


- ✧ Cellular Handsets and Accessories.
- ✧ Personal Digital Assistants.
- ✧ Notebooks and Handhelds.
- ✧ Portable Instrumentation.
- ✧ Peripherals.
- ✧ Pagers Peripherals.
- ✧ Desktop and Servers.

## FEATURES

- ✧ 450W peak pulse power (8/20 $\mu\text{s}$ ).
- ✧ Protects one data or power line.
- ✧ Ultra low leakage: nA level.
- ✧ Operating voltage: 5V.
- ✧ Ultra low clamping voltage.
- ✧ Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test Air discharge:  $\pm 30\text{kV}$ .
- ✧ Contact discharge:  $\pm 30\text{kV}$ .
- ✧ – IEC61000-4-4 (Lightning) 30A (8/20ns).
- ✧ RoHS Compliant.
- ✧ Lead Finish: Matte Tin.

## MECHANICAL CHARACTERISTICS

- ✧ SOT-323 Package.
- ✧ Quantity Per Reel : 3,000pcs.
- ✧ Reel Size : 7 inch.

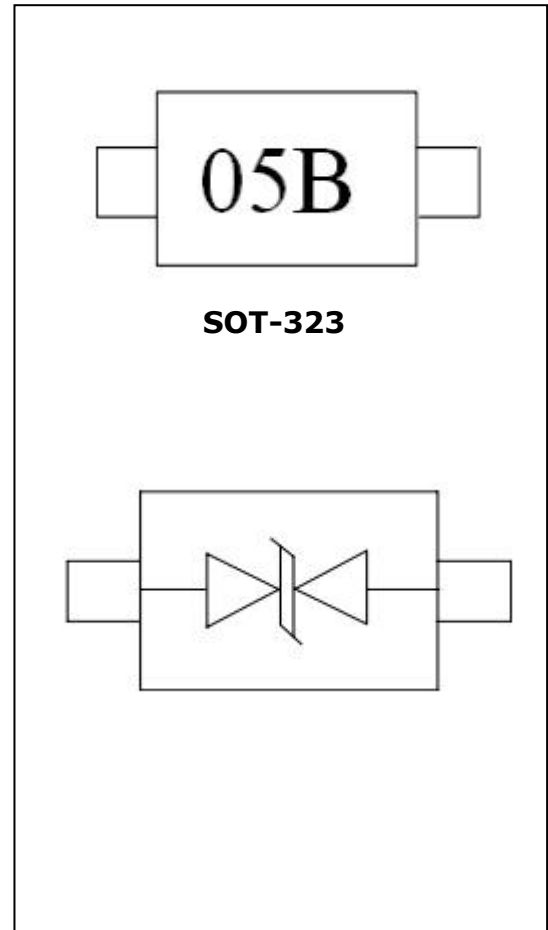

**DEVICE CHARACTERISTICS**
**Absolute Maximum Ratings ( $T_A=25^{\circ}\text{C}$  unless otherwise specified)**




Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 $\mu\text{s}$ )	Ppk	450	W
Peak Pulse Current (8/20 $\mu\text{s}$ )	IPP	30	A
ESD per IEC 61000-4-2 (Air)	VESD	$\pm 30$	kV
ESD per IEC 61000-4-2 (Contact)		$\pm 30$	
Operating Temperature Range	TJ	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	Tstg	-55 to +150	$^{\circ}\text{C}$


**ELECTRICAL CHARACTERISTICS( $T_A=25^{\circ}\text{C}$  unless otherwise specified)**

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	$V_{\text{RWM}}$				5	V
Breakdown Voltage	$V_{\text{BR}}$	$I_T = 1\text{mA}(\text{Pin1-Pin2})$	6.0	7.0	8.0	V
Reverse Leakage Current	$I_R$	$V_{\text{RWM}} = 5.0\text{V}(\text{Pin2-Pin1})$			0.5	$\mu\text{A}$
Clamping Voltage	$V_C$	$I_{\text{PP}} = 10\text{A} (8 \times 20\mu\text{s pulse}) (\text{Pin1-Pin2})$		9.0	11.0	V
Clamping Voltage	$V_C$	$I_{\text{PP}} = 30\text{A} (8 \times 20\mu\text{s pulse}) (\text{Pin1-Pin2})$		12.0	15.0	V
Junction Capacitance	$C_J$	$V_R = 0\text{V}, f = 1\text{MHz} (\text{Pin1-Pin2})$		60	100	pF


**ELECTRICAL PARAMETER**

Symbol	Parameter
$V_{RWM}$	Peak Reverse Working Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$

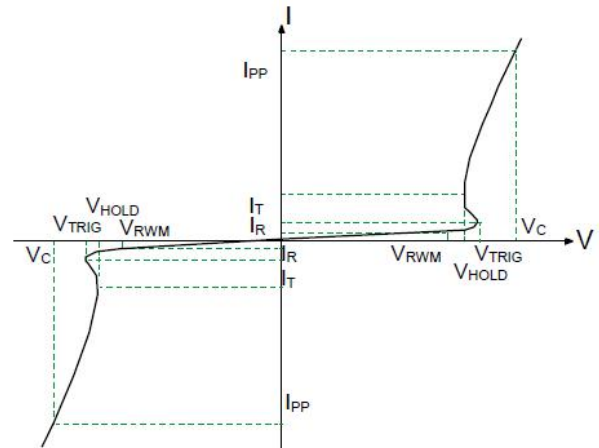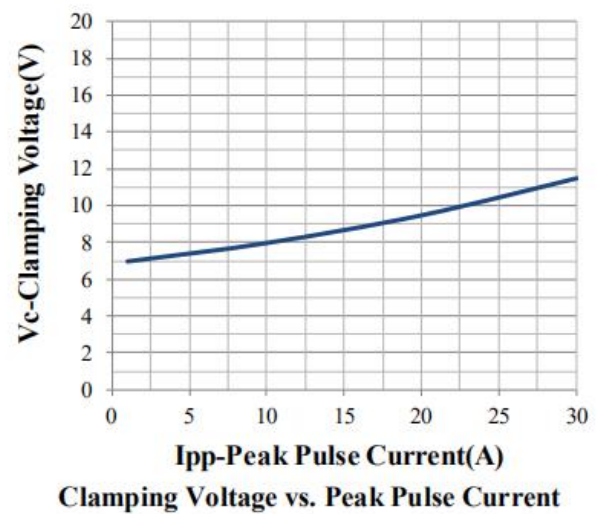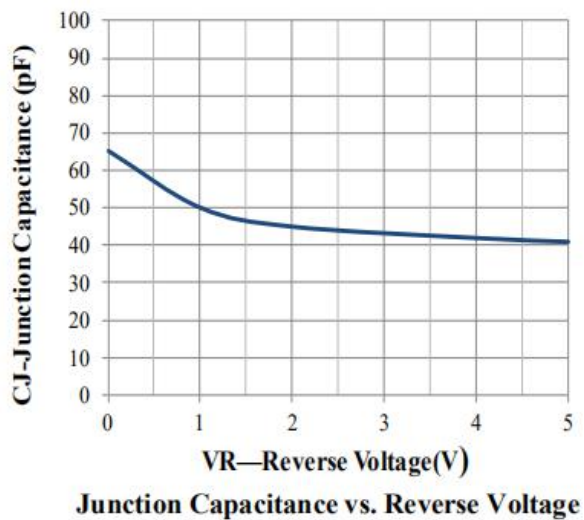

**TYPICAL CHARACTERISTICS**( $T_A=25^{\circ}\text{C}$  unless otherwise Specified)

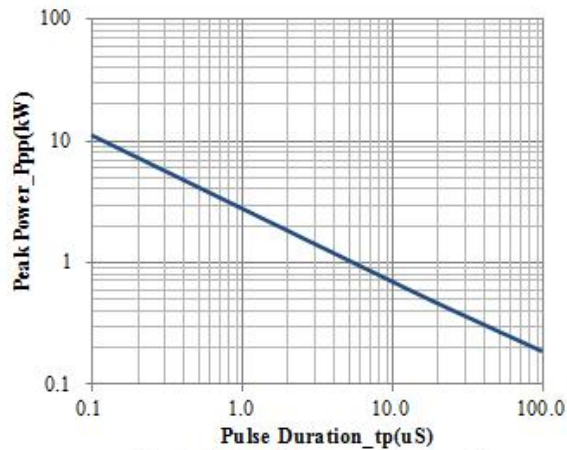


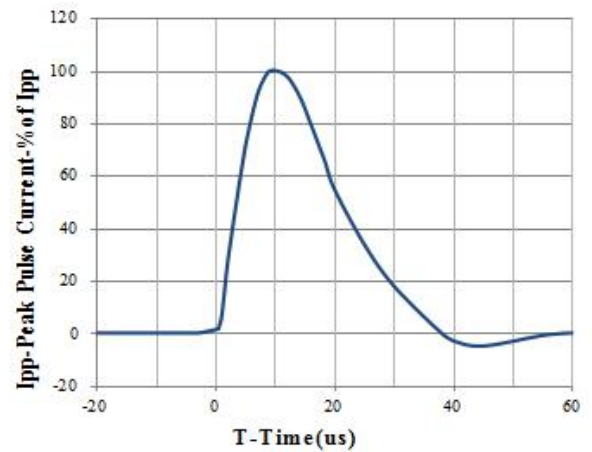
Peak Pulse Power vs. Pulse Time

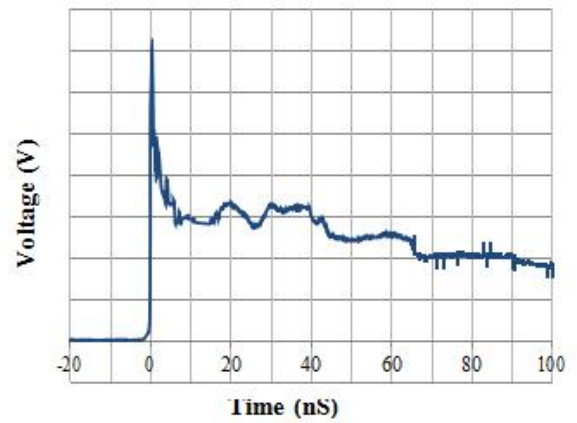

IEC61000-4-2 Pulse Waveform

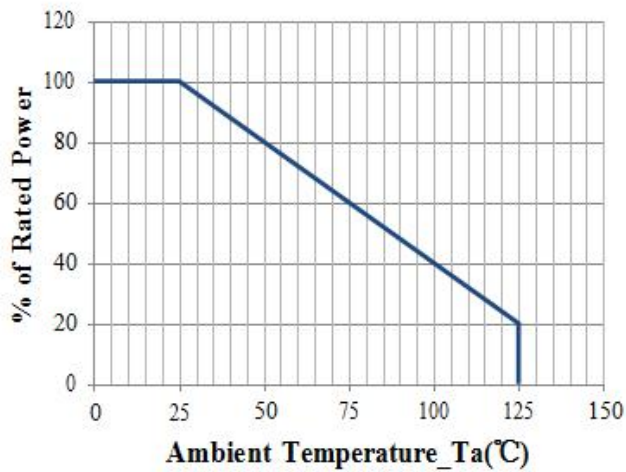


Power Derating Curve




8 X 20us Pulse Waveform

## SOLDERING PARAMETERS

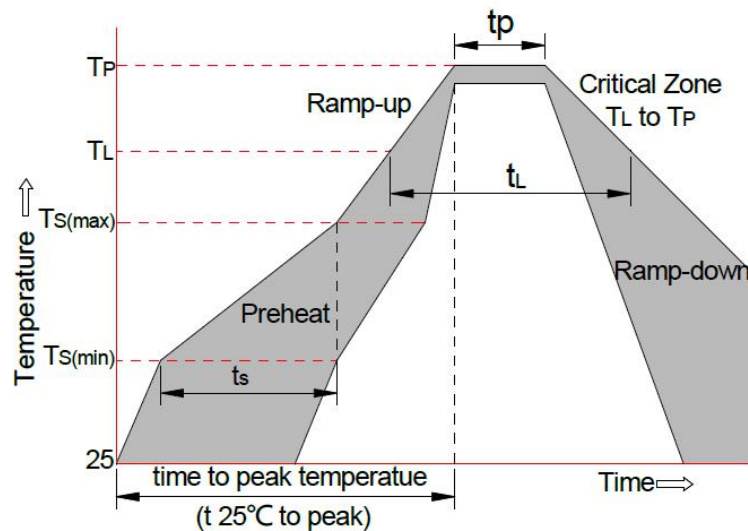


Reflow Condition		Pb-Free Assembly
Pre-heat	-Temperature Min ( $T_{s \text{ (min)}}$ )	+150°C
	-Temperature Max ( $T_{s \text{ (max)}}$ )	+200°C
	-Time (Min to Max) ( $t_s$ )	60-180 secs
Average ramp up rate( Liquid us Temp ( $T_L$ ) to peak)		3°C/sec. Max
$T_{s \text{ (max)}}$ to $T_L$ -Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature ( $T_L$ ) (Liquid us)	+217°C
	-Temperature ( $t_L$ )	60-150 secs
Peak Temp ( $T_p$ )		+260(+0/-5)°C
Time within 5°C of actual Peak Temp ( $t_p$ )		30 secs. Max
Ramp-down Rate		6 °C/secs. Max
xTime 25°C to Peak Temp ( $T_P$ )		8 min. Max
Do not exceed		+260°C

## SOT-323 PACKAGE OUTLINE & DIMENSIONS

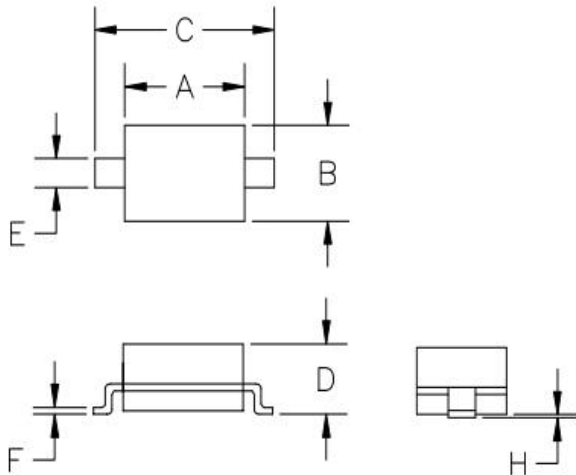

SYM	DIMENSIONS			
	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.50	1.80	0.060	0.071
B	1.20	1.40	0.045	0.054
C	2.30	2.70	0.090	0.107
D	-	1.10	-	0.043
E	0.30	0.40	0.012	0.016
F	0.10	0.25	0.004	0.010
H	-	0.10	-	0.004

**SUGGESTED LAND PATTERN**

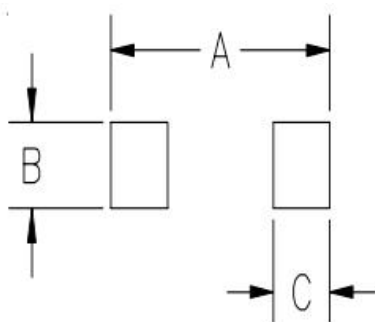

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
A	3.15	0.120
B	0.80	0.031
C	0.80	0.031

Website: <http://www.jksemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2016, jksemi